



Emirati Journal of Civil Engineering and Applications

Vol 4 Issue 1 (2026)

Pages (36 - 41)

Available at

www.emiratesscholar.com



باحثي الامارات
EMIRATES SCHOLAR
مركز بحوث ودراسات
RESEARCH & STUDIES CENTER

Perceptual Intelligence and Passive Energy-Saving Strategies in Building Systems: Adaptive Frameworks for Sustainable Performance in Hot Climates

* Mahsa Malekazari

Academy of Fine Arts Vienna

*Corresponding author: mahsa.malek@gmail.com

ARTICLE HISTORY

Received: 30 Oct 2025.
Accepted: 10 Dec 2025.
Published: 01 Apr 2026.

PEER - REVIEW STATEMENT:

This article was reviewed under a double, blind process by independent reviewers.

HOW TO CITE

Malekazari, M. (2026). Perceptual Intelligence and Passive Energy Saving Strategies in Building Systems: Adaptive Frameworks for Sustainable Performance in Hot Climates. *Emirati Journal of Civil Engineering and Applications*, 4(1), 36-41. <https://doi.org/10.54878/d283zx30>



Copyright: © 2026 by the author.
Licensee Emirates Scholar Center for Research & Studies, United Arab Emirates.
This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

ABSTRACT

This paper investigates how perceptual awareness of daylight contributes to passive energy-saving strategies and the overall performance of building systems in hot climates. The study aims to identify how human cognition and environmental perception—often neglected in technologically oriented sustainability approaches—affect the energy efficiency of built environments. Methodologically, the research applies a comparative qualitative framework, combining theoretical analysis of environmental perception models with case studies of vernacular architecture in arid regions. Architectural examples from Qajar-era buildings in Kashan, Iran, were analyzed to examine how spatial configuration, material selection, and daylight modulation enabled adaptive thermal comfort and visual quality without mechanical intervention. Results indicate that vernacular passive systems effectively integrated perceptual feedback and user participation, allowing occupants to regulate comfort through intuitive spatial behaviors. In contrast, contemporary mechanically controlled buildings often disrupt this cognitive-environmental connection, leading to increased energy use and reduced user engagement. The findings highlight the need to reintegrate perceptual feedback mechanisms into modern green-building technologies—including smart façades, daylight-responsive dashboards, and adaptive lighting systems. Embedding behavioral and perceptual intelligence into building-management frameworks enhances both energy efficiency and occupant satisfaction. The study concludes that future sustainability depends on systemic cooperation between human perception and adaptive control systems. Integrating passive design principles with perceptually informed technologies provides a pragmatic pathway toward low-carbon, high-performance building systems that cultivate user awareness alongside technological precision.

Keywords: *passive energy saving, green building technology, building systems, energy efficiency, environmental performance, vernacular architecture.*

1. Introduction

Passive energy-saving strategies are central to sustainable building design, particularly in hot climates where solar exposure and high ambient temperatures strongly affect performance. Although modern green technologies—from high-efficiency HVAC systems to automated shading—have improved environmental control, they often neglect cognitive and perceptual aspects of energy behavior (Hegger et al., 2012; Abdallah & Rashid, 2022).

Daylight, as a renewable resource, governs thermal comfort, lighting demand, and visual well-being (Tregenza & Wilson, 2011). Yet, increasing reliance on artificial lighting and mechanical cooling has diminished users' awareness of natural light and microclimatic variation. In many urban contexts, occupants rarely adapt their routines to solar rhythms, relying instead on technology for constant comfort. This detachment not only raises energy consumption but also weakens the feedback loop between architectural space and environmental awareness (Frontczak & Wargocki, 2011).

Vernacular architecture in hot and arid regions illustrates how environmental comfort and energy efficiency can be achieved through perceptual participation and spatial intelligence rather than mechanical control. Understanding this relationship between perception and performance provides valuable insight for improving green-building system efficiency today.

2. Technological Mediation and the Limits of Control

Modern sustainable buildings employ daylight-responsive systems—roof monitors, diffusing panels, photo-sensors, dimming controls, and adaptive façade blinds—to optimize lighting and reduce loads (Li & Lam, 2013; Yoon & Kim, 2020). These advanced tools combine active and passive subsystems to balance visual comfort with thermal efficiency.

However, their success depends on user engagement. Automated controls underperform when occupants are unaware of their purpose or override settings for convenience (O'Brien & Gunay, 2020). True energy efficiency therefore requires perceptual literacy—an informed relationship between users and environmental systems. Sustainable architecture must be understood as a communicative process that aligns technological mediation with human cognition.

3. Architecture as a Communicative Energy System

Böhme (2017) defines atmosphere as the shared spatial reality between the perceiver and the perceived. Lasswell's (1948) communication model—source, message, channel, receiver, and effect—helps explain how architecture transmits environmental information.

In energy-efficient design, environmental data or regulations form the source; architectural space is the channel; the message is the perceptual experience of light, temperature, and airflow; and occupants are the receivers. The resulting effect is behavioral adaptation, which determines real performance.

Viewing architecture as an energy-communication system underscores that spatial and material cues must clearly convey environmental change. When users perceive and respond to daylight variation, they cooperate with building systems, achieving higher passive efficiency (Nicol & Humphreys, 2002).

4. Vernacular Passive Systems in Hot-Climature Architecture

Traditional architecture in arid regions of the Middle East, North Africa, and South Asia offers exemplary models of passive environmental control. Courtyard houses and compact urban fabrics used orientation, massing, and transitional spaces to mediate

light and heat (Fathy, 1986; Edwards et al., 2006).

Shaded courtyards, deep-set windows, and semi-open verandas acted as thermal buffers and daylight moderators. During summer, occupants moved to shaded, ventilated areas; in winter, they occupied sun-lit zones. Wind catchers, high openings, and reflective plaster improved airflow and diffused light, achieving comfort without mechanical input.

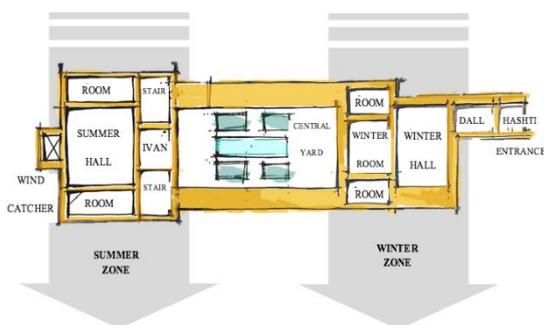


Fig.1. Typical space arrangements of earthen architecture during the Qajar dynasty

Figure 1. illustrates a typical Qajar building in Kashan. Separated parts of the house surrounding a central garden were used for family members' privacy as the merchants used to have business meetings at home. Meanwhile, different positions of rooms towards the sun provided various microclimates according to changing climatic conditions during days and seasons in the desert.

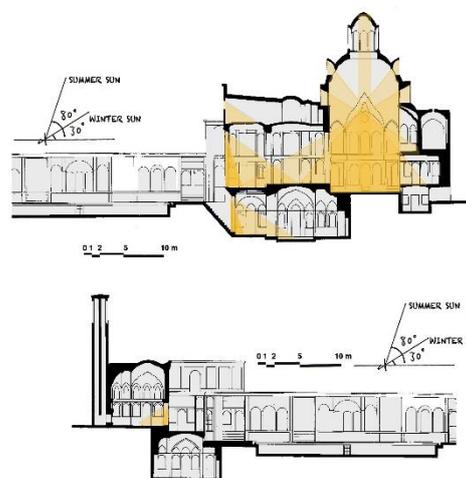


Fig. 2. An overview of Borujerdi House, Kashan, Iran. Top: Winter ivan. Bottom: Summer ivan.

Different components of architecture including forms, materials, ornaments, and the sequences and compositions of elements in Qajar buildings, regardless of their shape

and size, unite to provide the most energy efficient spaces according to the climate. Due to the low amount of moisture in desert regions, the difference in day and night temperatures is quite drastic, thus the changes in daily and seasonal microclimates are more noticeable in such regions. While these drastic changes have been mainly noted for thermal considerations, the effect of architecture on increasing individual cognitive skills can be found in other areas of spatial perception including how we perceive natural lighting in these buildings.

Fig. 3. The flow of sunlight in the Borujerdi's




complex, Kashan, Iran.

Top: The summer zone Bottom: The winter zone

The size, shape and dimensions of the openings have directly affected the position of lighting in Qajar buildings in Kashan. At the northern front of the Borujerdi's house for example, the ratio of the openings to the walls are considerably smaller than that of the southern walls of the summer hall. This ratio reaches about one-fifth in the eastern and western views (Fig 4.). Given that hot seasons mostly last longer in Kashan, the summer halls are superior in size as well as the number of functional or ornamental elements contained within them. Several openings at the upper elevations of the summer hall let indirect light in, while letting hot air out. The playfulness of shade and shadow is an integral component

of this architecture, which is provided by different architectural elements, from the general design of the building mass and void

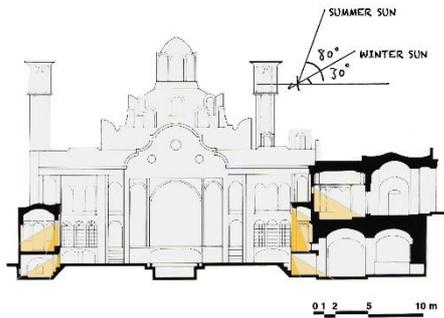

to the smallest shading details.

Fig. 4. The flow of sunlight in the eastern and western rooms of the Borujerdi's complex, Kashan, Iran.

Such buildings functioned as integrated systems whose performance relied on user awareness. Occupants intuitively understood spatial temperature gradients and adapted behavior accordingly—an early manifestation of user-centered environmental control (Ratti et al., 2003).

5. Cultural Transformation and Decline of Passive Engagement

With modernization and globalization of construction methods, adaptive spatial behaviors have been supplanted by mechanical and automated systems. Buildings that once balanced climate through natural ventilation and daylight now depend on constant energy input (Givoni, 1998).

This shift represents a perceptual disconnection: users no longer sense environmental feedback. Curtains remain drawn, air conditioners run continuously, and naturally lit spaces are underused. The building's passive systems lose functionality, creating a cycle of energy overconsumption despite advanced technology (Al-Sallal, 2016).

Since the beginning of the Pahlavi II era in 1940 in Iran, along with changes in culture, economy, and social relations, most of these

buildings have turned into museums, hotels, and tourist attractions. Traditional wind-catchers were mostly invaded by modern air conditioning systems, and also several connecting stairways were blocked for security reasons (see Figure 5). According to current occupants of the remaining buildings, it is not possible to eliminate detached modern air conditioners and the functional zones have been mostly reduced to the south-



facing winter zones which were originally designed to catch most of the light and warmth in cold seasons.

Fig. 5. Destructive changes in functionality of traditional houses, Kashan, Iran.

Although the summer hall remains architecturally intact and ideally designed to shield occupants from direct sunlight and extreme heat during hot days, contemporary use patterns have reversed its purpose. Today, people predominantly occupy the winter zone throughout the year—a space originally intended for colder seasons. As a result, substantial energy is expended on cooling these rooms, curtains remain closed to block excessive heat, and artificial lighting has replaced the abundant natural daylight once utilized. This decline in climatic responsiveness reflects not a failure of design but a breakdown in the social and perceptual context of use. The once highly functional architecture has become environmentally inefficient due to a diminished capacity among occupants to recognize and respond to variations in sunlight intensity and duration.

As illustrated in Figure 6., a former summer hall in an inhabited building now serves

merely as a storage area. Despite its favorable microclimate—naturally cooler than the adjoining garden and adequately illuminated without heat gain—it remains unused.



According to current residents, the absence of a roofed connecting corridor discourages passage through the open courtyard, leading to the abandonment of this otherwise comfortable and energy-efficient space.

Fig. 6. An abandoned summer residence in Kashan traditional houses, Kashan, Iran

Re-establishing environmental literacy through design education and interactive systems can reverse this pattern and restore the human-environment reciprocity essential to sustainable performance.

6. Reintegrating Perception into Modern Building Systems

The evolution of sustainable architecture necessitates a paradigm shift from mechanistic optimization toward an integrative ecological intelligence—one that couples passive environmental strategies with perceptual and behavioral feedback systems. Future green-building technologies must not only regulate thermal and luminous conditions through automated control, but also cultivate human attunement to the dynamics of natural light and climate. Advanced interfaces such as smart façades, daylight-responsive dashboards, and adaptive interior illumination provide real-time sensorial cues that reveal the energetic consequences of occupants' actions (Kim et al., 2021). Through such mediated awareness, users become active participants within the environmental system, co-producing comfort rather than merely consuming it.

Embedding behavioral interaction into building-management frameworks thus transforms occupants from passive recipients into integral agents of environmental performance, aligning subjective comfort with systemic efficiency (Gunay et al., 2019). In hot-arid regions, where thermal differentials and solar exposure are extreme, this synergistic model—merging passive climatic design with perceptually interactive technologies—constitutes a critical advancement toward a human-centered yet high-performance architectural ecology. It situates sustainability not merely in material or mechanical domains, but within the reciprocal dialogue between perception, behavior, and built form.

7. Conclusion

High-performance building systems are evolving toward a multi-scalar integration of environmental sensing, adaptive control, and human-centered interaction. Future sustainability will depend less on isolated technological efficiency and more on the synergistic interoperability of passive design, predictive analytics, and occupant-responsive feedback. When building envelopes, control systems, and behavioral interfaces operate as interlinked subsystems, the built environment becomes a living infrastructure capable of continuous optimization.

This integration requires data-driven frameworks that merge environmental simulation, Internet of Things (IoT) networks, and machine-learning algorithms with real-time occupant input. Such convergence can recalibrate energy models dynamically, refine predictive maintenance, and personalize comfort profiles—all while minimizing total energy demand and carbon emissions. In essence, sustainable performance will emerge not from any single technology, but from the systemic coherence among design intelligence, operational analytics, and user perception. The fusion of passive bioclimatic principles with active, perceptually informed control architectures defines a pragmatic

pathway toward next-generation, low-carbon, adaptive building ecosystems—where technological precision and human awareness collectively drive environmental resilience.

References: Abdallah, S., & Rashid, Y. (2022). Smart shading systems for sustainable buildings in hot-arid climates. *Energy and Buildings*, 272, 112397.

Al-Sallal, K. (2016). *Designing sustainable buildings in the Middle East*. Routledge.

Böhme, G. (2017). *Atmospheric architectures: The aesthetics of felt spaces*. Bloomsbury.

Edwards, B., Sibley, M., Hakmi, M., & Land, P. (2006). *Courtyard housing and cultural sustainability: Theory, practice and product*. Routledge.

Fathy, H. (1986). *Natural energy and vernacular architecture: Principles and examples with reference to hot arid climates*. University of Chicago Press.

Frontczak, M., & Wargocki, P. (2011). Literature survey on how different factors influence human comfort in indoor environments. *Building and Environment*, 46(4), 922-937.

Givoni, B. (1998). *Climate considerations in building and urban design*. Wiley.

Gunay, H. B., O'Brien, W., & Beausoleil-Morrison, I. (2019). Implementation and comparison of existing occupant behavior models in energy simulation tools. *Journal of Building Performance Simulation*, 12(2), 208-221.

Hegger, M., Fuchs, M., König, A., & Hänselmann, P. (2012). *Energy manual: Sustainable architecture*. Birkhäuser.

Kim, J., Yoon, J., & Cho, S. (2021). Dynamic façade systems for daylight and energy performance in desert climates. *Renewable Energy*, 170, 1207-1219.

Lasswell, H. (1948). The structure and function of communication in society. In L. Bryson (Ed.), *The communication of ideas* (pp. 37-51). Harper & Brothers.

Li, D. H. W., & Lam, T. N. T. (2013). Evaluation of lighting performance in office buildings with automated daylight systems. *Energy Procedia*, 42, 440-448.

Nicol, J. F., & Humphreys, M. A. (2002). Adaptive thermal comfort and sustainable thermal standards for buildings. *Energy and Buildings*, 34(6), 563-572.

O'Brien, W., & Gunay, H. B. (2020). The contextual factors contributing to occupants' adaptive behaviors in buildings. *Building and Environment*, 177, 106851.

Ratti, C., Raydan, D., & Steemers, K. (2003). Building form and environmental performance: Archetypes, analysis and an arid climate case study. *Energy and Buildings*, 35(1), 49-59.

Tregenza, P., & Wilson, M. (2011). *Daylighting: Architecture and lighting design*. Routledge.

Yoon, S., & Kim, S. (2020). Performance assessment of daylight-responsive control systems in office buildings. *Building Research & Information*, 48(7), 755-769.